



## P8SP4PT - Panther SuperPass Series Free-standing Hot Cupboard - Bain Marie Top - W 1800 mm - 11.62 kW

Offering unrivalled versatility, the Panther Super Pass Hot Cupboard is built for high demanding environments, with multiple hot holding and cooking functions in one mobile unit.

- ✓ For high output, demanding environments this incredibly versatile pass offers multiple hot holding and cooking functions in one mobile unit. The pass includes a Carter Hoffmann Crisp 'N Hold for holding chips and breaded products such as chicken nuggets, 2 x 1/1GN bain marie for hot holding sauces, soups, gravy and precooked foods and 2 x water tanks, suitable for boiling vegetables, pasta etc.
- ✓ Thernostatically controlled bain marie
- ✓ Accurate digital electronic control of water tanks
- ✓ Individual drain tap for each water tank at the rear
- ✓ Castors as standard
- ✓ Three tier heated gantries
- ✓ Pass through hot cupboard
- ✓ Fully 1/1GN compatible hot cupboard accommodating 4 1/1 gastronorms

### Specifications

#### Summary

<b>Range Name</b>	Panther
<b>Power Type</b>	Electric
<b>Unit Type</b>	Free-standing
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN Code</b>	5056105109860

#### Power and Performance

<b>Gastronorm Capacity</b>	4 x GN1/1
<b>Total Power kW</b>	11.62
<b>IP Rating</b>	IP24
<b>Plate Capacity</b>	396
<b>Temperature Control</b>	Top: Mechanical/Bottom: Electronic

#### Key Specifications

<b>Drain Location</b>	Rear-mounted
<b>Number of Shelves included</b>	1
<b>Number of Shelf Positions</b>	1
<b>Pot Type</b>	Gastronorm
<b>Type of Heat</b>	Wet/Dry
<b>Heated Base</b>	Yes
<b>Heated Gantry</b>	Yes
<b>Static or Mobile</b>	Mobile

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	1908
<b>Unit Width (External) mm</b>	1880
<b>Unit Depth (External) mm</b>	900
<b>Height (Internal) mm</b>	405
<b>Width (Internal) mm</b>	1400
<b>Depth (Internal) mm</b>	490
<b>Shelf Dimensions Width mm</b>	1334
<b>Shelf Dimensions Depth mm</b>	490
<b>Net Weight Kg</b>	200

#### Supply Connections

<b>Requires Installation</b>	Yes
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	No
<b>Requires Hardwiring</b>	Yes
<b>Electrical Supply Rating Watts</b>	11,620
<b>Three Phase Amps</b>	L1=17.4 ; L2=17.4 ; L3=15.7
<b>Three Phase Voltage</b>	400

#### Shipping




<b>Packed Weight Kg</b>	230
<b>Packed Height cm</b>	200
<b>Packed Width cm</b>	190
<b>Packed Depth cm</b>	90

Available Accessories

PLK/S

PLK/S - LEG KIT [FOR CONVERSION IN THE FIELD]

Technical Picture

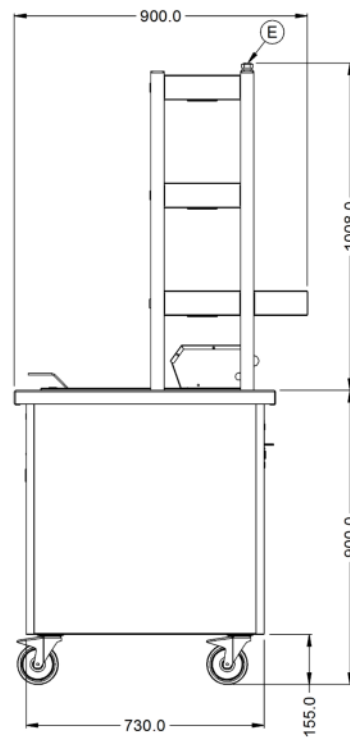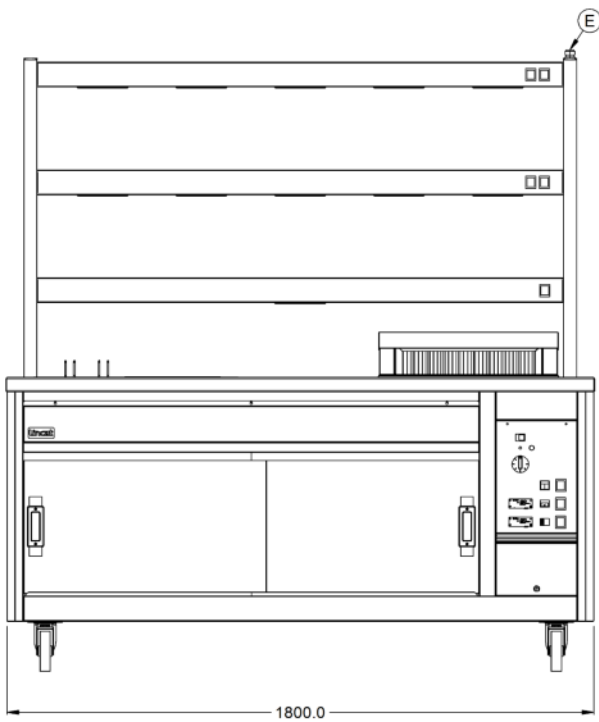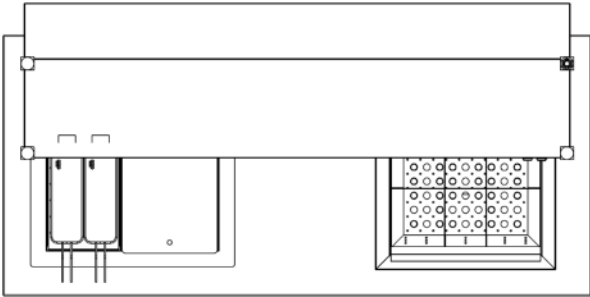



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** [care@lincat.co.uk](mailto:care@lincat.co.uk)

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** [export@lincat.co.uk](mailto:export@lincat.co.uk)

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm