

SMARTVIDE6 230/50-60/1 UK Max. capacity: 56 lt./14 gal.



SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable. Ideal for regeneration.

Interchangeable between °C and °F.

4 user-friendly control buttons.

FEATURES AND BENEFITS

Portable precision cooker with stirrer for up to 56 lt. / 14 gal. containers. Deisgned for chefs, developed with chefs.

 \checkmark The thick stainless steel, robust construction guarantees commercial performance. The front panel and the grip are made of fiberglass-reinforced polyamide.

✓ SmartVide guarantees cooking at a **precisely controlled temperature** while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.

✓ Allows cooking food in their own juice and using this juice immediately after cooking to **enhance flavors**.

 \checkmark Marinates and macerates an ingredient in half the time.

 \checkmark Infuses and flavors oil, fat or other products applying the controlled temperature technique.

✓ Increses profits due to lack of product shrink.

✓ Requires **very little hands-on time**, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. 4 buttons and a full-color TFT display that offers **all the information at a glance** makes operation a child's play.

✓ SmartVide6 is **portable**: thanks to their ergonomic handle, SmartVide6 can be taken from a container to another easily. Additionally, the optional bag allows easy transport - wherever the Chef goes.

Accessories

- Insulated tank for SmartVide immersion circulator
- Lid for SmartVide
- □ Floating balls for SmartVide
- SmartVide transport bag





www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet updated 01/08/2018



SMARTVIDE6 230/50-60/1 UK

Max. capacity: 56 lt./14 gal.

P/N 1180023

SPECIFICATIONS

Temperature

Display precision: 0.01 °C Range: 5 °C - 95 °C

Permissible ambient temperature: 5 °C - 40 °C

Time

Resolution: 1 '

Cycle duration: 1 ' - 99 h

General features

Maximum recipient capacity: 56 l

Total loading: 2000 W

Submergible part dimensions: 117 mm x 110 mm x 147 mm


External dimensions (WxDxH): 124 mm x 140 mm x 360 mm


Net weight: 3.6 Kg

Crated dimensions

440 x 190 x 310 mm

Gross weight: 5.5 Kg.

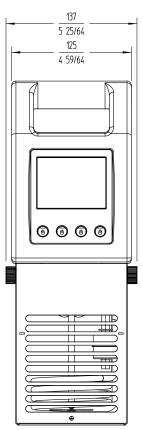

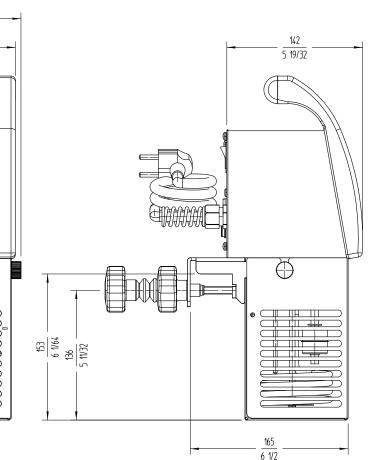



www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road

LE4 9LS - Leicester uksales@sammic.com Tel.: +44 0116 246 1900

Troon Industrial Park



Project	Date
Item	Qty
Approved	

product sheet updated 01/08/2018