



## HB1 - Seal Counter-top Heated Display Base - 1 x 1/1 GN - W 380 mm - 0.5 kW

The Seal Heated Display Base is an affordable choice where overhead heat and illumination is not required, for example where covered dishes are served.

- ✓ Minimum food holding temperature of 72°C
- ✓ Thermostatic control allows base heat to be adjusted to suit a variety of food products
- ✓ Aluminium surface for energy-efficient heat conduction
- ✓ An affordable choice for when overhead heat and illumination is not needed – for example where covered dishes are served
- ✓ Robust stainless steel construction – hygienic and easy to clean

### Specifications

#### Summary

<b>Range Name</b>	Seal
<b>Power Type</b>	Electric
<b>Unit Type</b>	Counter-top
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN Code</b>	5056105104308

#### Power and Performance

<b>Gastronorm Capacity</b>	1 x GN1/1
<b>Total Power kW</b>	0.5
<b>Temperature Range °C</b>	68 [minimum]
<b>IP Rating</b>	IP33
<b>Temperature Control</b>	Mechanical

#### Key Specifications

<b>Heated Base</b>	Yes
<b>Heated Gantry</b>	No

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	112
<b>Unit Width (External) mm</b>	380
<b>Unit Depth (External) mm</b>	505
<b>Net Weight Kg</b>	7.2




#### Supply Connections

<b>Requires Installation</b>	No
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	Yes
<b>Requires Hardwiring</b>	No
<b>Electrical Supply Rating Watts</b>	500
<b>Single Phase Amps</b>	2.2
<b>Single Phase Voltage</b>	230

#### Shipping

<b>Packed Weight Kg</b>	9.9
<b>Packed Height cm</b>	25
<b>Packed Width cm</b>	70
<b>Packed Depth cm</b>	55

### Technical Picture

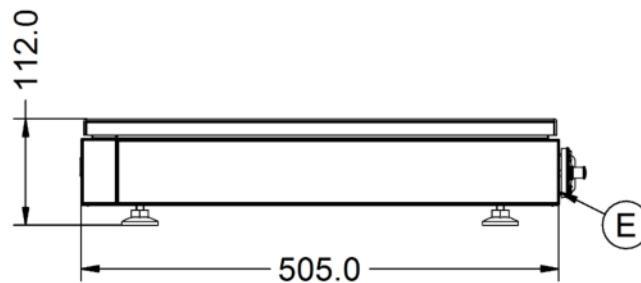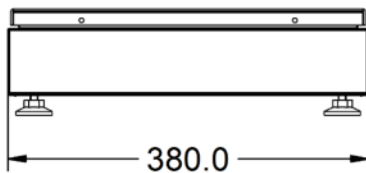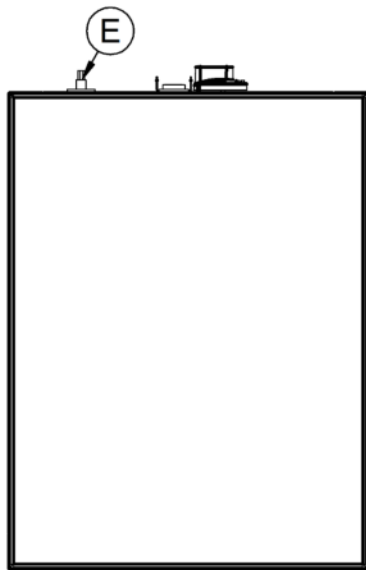

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm